

## AISI304 stainless steel pump body

Pump body made of AISI304 stainless steel, durable stainless steel

## AISI304 不锈钢泵体

泵体采用AISI304不锈钢, 经久耐用不锈钢



## Equipped with motor heatsink

Beautiful shape, well-designed. Scientific increase in strip heat sink area, effectively reducing motor temperature, cooling speed, extend the

## 配备电机散热片

造型美观, 设计精良。科学增加条形散热片面积, 有效降低电机温度, 冷却速度快, 延长电机使用寿命。



## Waterproof connector


Effectively reduce the chance of water leakage, higher safety factor, quality assurance!

## 采用防水接头

有效降低进水漏电几率, 安全系数更高, 品质保证!



# Apply to | 适用于

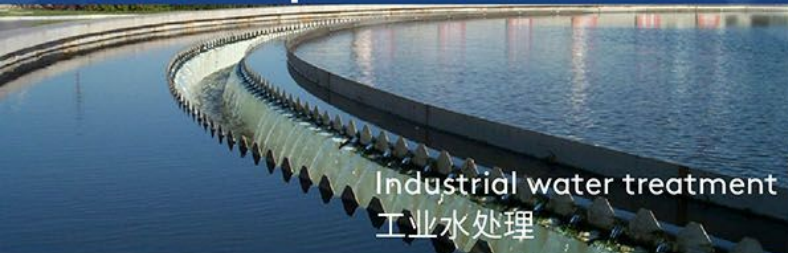

Industrial water treatment  
工业水处理



Desalination  
海水淡化



Agricultural irrigation  
农业灌溉



Food and medicine  
食品医药



District heating  
区域供热





# Horizontal Centrifugal Pump Stainless Steel Booster Pump

## 卧式离心泵不锈钢水泵

叶轮导叶采用不锈钢冲压焊接制成，配加长轴电机，轴向入口和径向出口。

适用于工业用水，区域供热。暖通空调，海水淡化，农业灌溉，食品医药以及其他工业应用。

The impeller guide vanes are made of stainless steel stamped and welded, with long shaft motors, axial inlets and radial outlets.

Suitable for industrial water, district heating, HVAC, seawater desalination, agricultural irrigation, food and medicine, and other industrial applications.

Size   尺寸	400mm (L) x 145mm (D) x 215/230mm (H)						
kW	0.37						
Q(m <sup>3</sup> /h)	0.5	1.0	1.5	2.0	2.5	3.0	3.5
pressure 压力	28	26.5	24.5	22	19	15.5	12



Model | 型号: CNP 2-30



Size   尺寸	400mm (L) x 145mm (D) x 215/230mm (H)						
kW	0.55						
Q(m <sup>3</sup> /h)	0.5	1.0	1.5	2.0	2.5	3.0	3.5
pressure 压力	36	34.5	33	29	25	20.5	16

Model | 型号: CNP 2-40



Model | 型号: CNP 4-40

Size   尺寸	445mm (L) x 170mm (D) x 225/245mm (H)						
kW	0.75						
Q(m <sup>3</sup> /h)	0.5	1.0	1.5	2.0	2.5	3.0	3.5
pressure 压力	36	34.5	33	29	25	20.5	16

## Features | 特色



Compact structure  
紧凑设计



Low Noise  
低噪音



Corrosion Resistance  
耐腐蚀



Small Volume  
体积小巧

