

High temperature heat treatment inlet

High temperature heat treatment, high hardness
Wear-resistant and corrosion-resistant, not easy to rust

高温热处理进水口

高温热处理, 硬度高
耐磨耐腐蚀, 不易生锈



Pressure tank

Automatic pressure storage to avoid water taps
Frequent start when starting a little

压力储气罐

自动存压, 避免水龙头
少许开的时候频密启动



Microcomputer control

When the pressure control system enters protection, it automatically
switches to the flow control system. Ensure the normal water supply to the pump

微电脑控制

当压力控制系统进入保护时, 自动切换到流量控制系统,
确保水泵正常供水



Automatic adjustment switch

Can switch for a long time, water shortage or overload
on the pump. Play a protective role.

自动调节开关

可长时间开关, 对水泵缺水或过载
起到保护作用。

Induction transmitter; copper water cover

High sensitivity, automatic induction;
Anti-rust does not appear to open.

感应传送器; 全铜饮水盖

灵敏度高, 全自动感应;
防锈, 不会出现打不开现象。



Nylon fan thicker external


After fan blade cooling, longer life

尼龙风叶加厚外置

经过风叶降温, 寿命更长



Automatic pressurized self-priming pump 全自动增压自吸泵

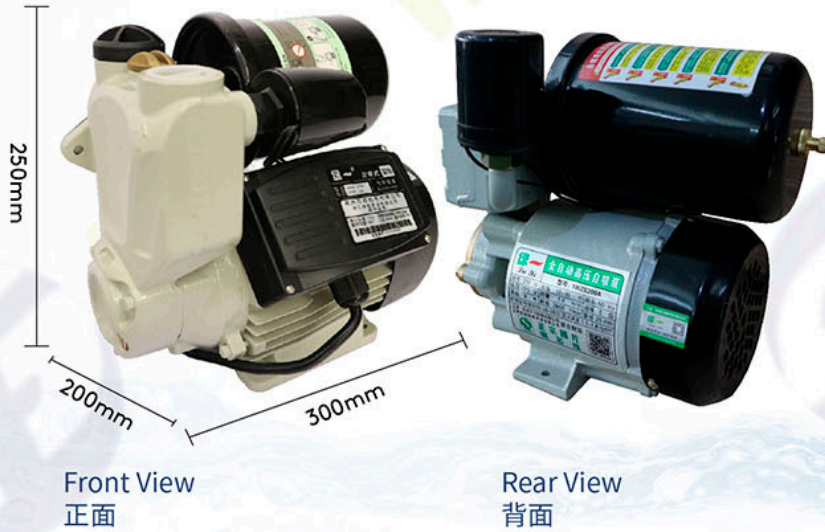

Model	型号	1WZB-200A
Rate Walt	额定功率	200W
Suck Range	吸程	9m
Range	扬程	12-30m
Flow	流量	1.8m /h
Dimension	口径	25mm
Spinning	转速	2860r/min
Rate	额定电压/电流	220V/50Hz/1.0A

Model	型号	JLM60-370A
Rate Walt	额定功率	370W
Suck Range	吸程	9m
Range	扬程	35m
Flow	流量	2.2m /h
Dimension	口径	25mm
Spinning	转速	2860r/min
Rate	额定电压/电流	220V/50Hz/1.4A



Model	型号	JLM60-750A
Rate Walt	额定功率	750W
Suck Range	吸程	9m
Range	扬程	50m
Flow	流量	3.8m /h
Dimension	口径	25mm
Spinning	转速	2860r/min
Rate	额定电压/电流	220V/50Hz/2.7A

